enteliVIEW-10

Touchscreen

Description

enteliVIEW-10 is a powerful, 10.1 inch capacitive touchscreen that connects seamlessly to your building automation systems over a thin-client interface.

With robust construction ideal for high-traffic areas, enteliVIEW delivers real-time insights and control via enteliWEB and enteliVIZ, making it perfect for offices, conference rooms, and technical environments.

Integrated LED indicators on either side allow quick visual status updates with red and green signals, while a built-in buzzer delivers audible alerts, all controllable via a Red5 controller.



Application

- ► Thin-client web panel
- Local interface to building automation systems
- Displays enteliVIZ graphics, enteliWEB dashboards, or other content accessible through a web interface

Features

- ▶ Durable aluminum housing
- Full screen browser display, options for tabbed browser functionality
- ► Pinch-to-zoom gesture support
- ► LED indicators and built-in buzzer, accessible from Red5 devices for use in control sequences
- ► Power supply via PoE+ or 12 VDC

Specifications

Screen

Diagonal 10.1 in.
Brightness 500 cd/m²
Contrast 400:1
Resolution 1280×800
Lifetime minimum 25,000 h (at 50% of nominal brightness)

Touchscreen

Capacitive

Power

PoE+ (max 100 m) 12 VDC, 30 W (tolerance 5%)

Connectors

- $1 \times RJ45 (10/100/1000 Mbps)$
- 1 × 12 V power (barrel connector)
- 2 × USB A
- 1 × Micro USB
- $1 \times Micro SD$
- $1 \times HDMI$

Dimensions

262×175×29 mm (10.3×6.9×1.1 in.)

Weight

1.3 kg (2.2 lb)

Installation

VESA 100 × 100 mm (3.9 × 3.9 in.)

Ambient Rating

0°C to 35°C (32°F to 95°F) 0% to 90% RH, non-condensing

Compliance


UL CSA FCC ICES CE UKCA RoHS





enteliVIEW-10

Dimensions

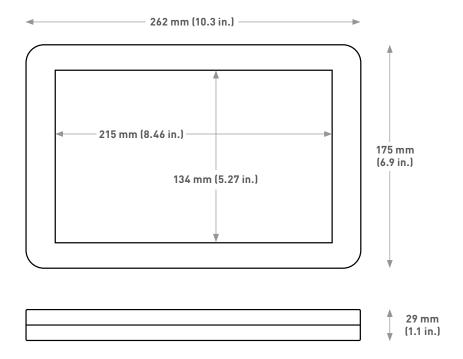



Standard version enteliVIEW-10 SILVER



VESA wall mount adapter

Ordering

Order the enteliVIEW-10 according to the following product numbers:

920800	enteliVIEW-10 SILVER web panel, 10.1 in. touchscreen, Ethernet, PoE+ or 12 VDC, includes DC power jack male plug adapter
920801	VESA 100 WALL-MOUNT for enteliVIEW-10
508888	AW-FET-060C-065 4xFE PoE + 2xFE UTP switch, 65 W
508380	DRC-12V030W1RZ Chrome II line voltage DC power supply, 12 VDC, 30 W

Important: Power supply and mounting hardware are sold separately. See suggested part numbers above.

Updated March 2025

Subject to change without notice.



